

VELO A modern cuboid luminaire.

CONSTRUCTION:

Fabricated aluminum housing construction and seamless opal lens.
 Lens is lightly sandblasted to diffuse glow. All external hardware is stainless steel.

LAMPING: *See Lamping Chart*

LED: High power CREE LEDs with 50,000hrs rated lamp life @ 70% lumen maintenance. *Available in:*
 CW - Cool White, 5000-7000°K color temperature.
 WW - Warm White, 3500°K color temperature.
 NW - Neutral White, 4100°K color temperature.

FLUORESCENT:

Miniature Bi Pin Holders Provided to accept the Linear Fluorescent T5 HO lamps (by others)

ELECTRICAL:

Select from 120V, 277V, 347V
 (consult Solera for additional voltages)
 Electronic Ballast is standard on all LED, CFL, BIAx and Fluorescent lamps.

SHIELDING/LENS :

OPL LSB - Enclosed Opal Lens with Light Sandblasted Finish
 CGL - Color Glow Lens (red, blue, green etc.)
 Consult Solera for Color Options

MOUNTING:


4AC - 48" Aircraft Cable with ST cord mounts to rigid ceiling structure (by others)
 CM - Ceiling mounted to recessed J-Box (by others)
 WM -Wall mounted with arm to recessed J-Box (by others)

OPTIONS:

DM - 0-10V Dimming
 TP- Tamperproof Hardware
 TS - Tamperproof Screwdriver
 IP65 Rated Enclosure
 EM - Emergency Operation
 RGB - Red, Green, Blue
 DMX Controlled

FINISH:

Electrostatically applied, thermally cured polyester powder coated paint. *Available in Solera Standard colors:*
 BL - Minitex Black
 WH - Minitex White
 SG - Silver Gray
 BZ - Minitex Bronze
 CC - Custom Color **Adder** Please consult Solera

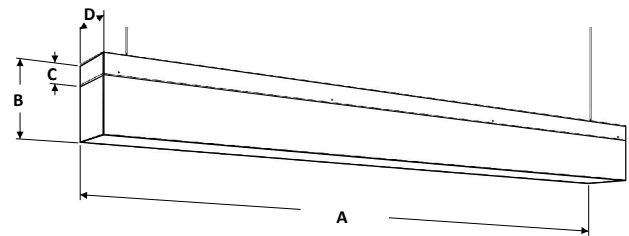

	A	B	C	D
VELO 24	24"	9.5"	8"	2.5"
VELO 36	36"	9.5"	8"	2.5"
VELO 48	48"	9.5"	8"	2.5"
VELO 96	96"	9.5"	8"	2.5"

PROJECT	DATE	QTY						
NAME	SIZE	LAMPING	COLOR	VOLT	SHIELDING	MOUNTING	OPTIONS	FINISH
VELO	24"	*See Chart*	TEMP.	120V	LENS	AC	LSB	WH
	36"		(LED)	277V	OPL	CM	DM	BL
	48"		WW	347V	CGL	WM	TP	SG
	96"		NW	120/277V			TS	BZ
			CW				IP65	CC*
							EM	
							RGB	
							DMX	

LAMPING CHART BY LENGTH 'A'

	24"	36"	48"	96"
LED	18LED 22W 2340 Lm (CW)	24LED 36W 3120 Lm (CW)	44LED 36W 3900 Lm (CW)	60LED 72W 5720 Lm (CW)
LINEAR FLUORESCENT	F24T5HO	F36T5HO	F57T5HO	2F57T5HO
OTHER Consult Factory				

