

PENDANT

Simple yet aesthetically pleasing pendant designed for interior spaces. Spun mate anodized .063 aluminum housing construction. Available with 3 aluminum decorative bars.

LAMPING:

- 9W LED
- 18W LED
- 24W LED
- 36W LED

LEDs with 50,000 hrs rated lamp life @70% lumen maintenance. 5000K Cool White is standard color temperature.

Available in:

- WW - Warm White (3000K)
- NW - Neutral White (4000K)
- CW - Cool White (5000K)

ELECTRICAL:

High-efficiency driver with short circuit, over voltage and over temperature protection.

Working ambient temperature range of -40C to +40C.

Available in 120V-277V also 347V-480V.

Consult Solera for specific wattages, etc.

LENS/SHIELDING :

- O Open Bottom

MOUNTING:

3AC48 - 3 X 48" Long aircraft cables with canopy for a flat ceiling. Canopy mounts to standard recessed J-Box (by others)

P24" - 24" long 3/4 OD stem with canopy for flat ceiling, mounts to recessed J-Box (by others)

CM - Ceiling Mount

OPTIONS:



- DM 0-10V Dimming
- DM1 Dimming 1%
- EM Emergency Operation
- D Down Light
- SF Single Fuse
- E Enclosed Lens
- CL Clear Lens
- FG Frosted Lens
- DC Dust Cover for Top

FINISH:



Electrostatically applied, thermally cured, polyester powder coated paint finish. Available in Solera standard colors:

- WH - Minitex White
- BL - Minitex Black
- BZ - Minitex Bronze
- SG - Minitex Silver Gray
- CC - Custom Color (Consult Solera)


BA4 - Brushed Aluminum #4

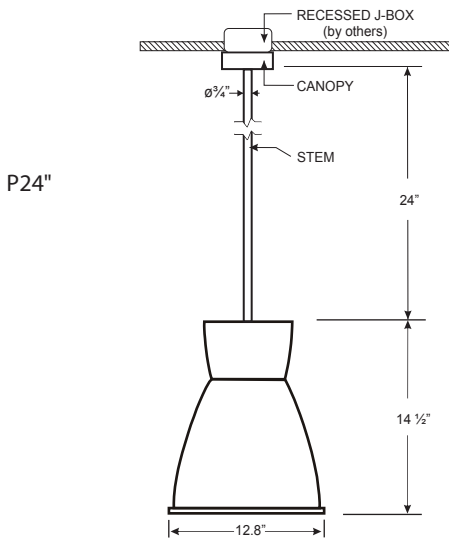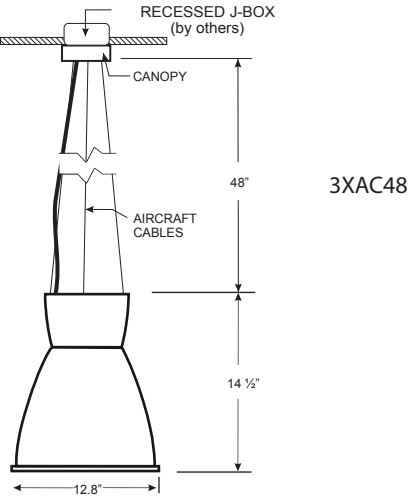

Ceiling Mount



SP 700 - Without Bars



SP 703 - With 3 Deco Bars

SP700 Series

PROJECT	DATE	QTY						
SP700Series								
NAME	LAMPING	COLOR TEMP. (LED)	VOLT	LENS	OPTICS	MOUNTING	OPTIONS	FINISH (TRIM)
	9WLED			O		3XAC48	DM	
	18WLED	WW	120V			P24"	DM1	WH
	24WLED	NW	277V			CM	EM	BL
	36WLED	CW	347V				D	BZ
			120/277V				SF	SG
							E	CC*
							CL	BA4
							FG	
							DC	

Std. = STANDARD

*CC - Custom Color, adder applies, please consult Solera