
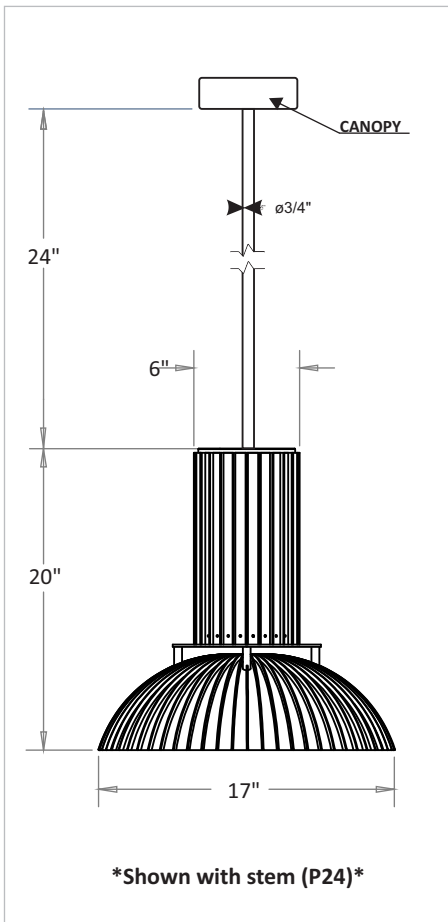


The AOR-HB is a modern merging of pendant and highbay. With the power of a Highbay and the beauty of a decorative pendant this well made luminaire can serve many purposes. Made of heavy duty extruded aluminum driver housing and cast aluminum skirt this fixture is meant to stand the test of time.

PENDANT

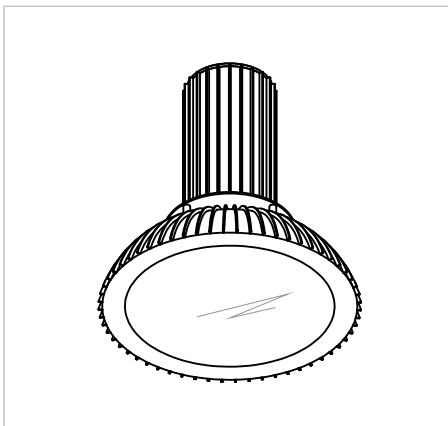

AOR-HB

**LAMPING:**

**215W LED (max)** High Power chip on board (COB) technology with 50,000 hr life span at 70% lumen maintenance.  
Temperatures available:  
NW - Neutral White (4100°K) (Approx 18,000lm @350mA)

**108W LED** High Power chip on board (COB) technology with 50,000 hr life span at 70% lumen maintenance.  
Temperature available:  
NW - Neutral White (4100°K) (Approx. 11,000 Lm @350mA)

*\*Other wattages and color temperatures are available, please consult Solera for custom lumen packages\**

**ELECTRICAL:**

Select from 120V, 277V, 347V (consult Solera for additional voltages)  
Magnetic Ballast is standard on most HID lamps. For electronic ballast specify ELB after the lamp option.  
Electronic Ballast is standard on all LED, CFL, BIAX and Fluorescent lamps.

**OPTICS/SHIELDING:**

TV - Type V distribution is standard.

**ELECTRICAL:**

Select from 120V, 277V, 347V (consult Solera for additional voltages)  
Magnetic Ballast is standard on most HID lamps. For electronic ballast specify ELB after the lamp option.  
Electronic Ballast is standard on all LED, CFL, BIAX and Fluorescent lamps.

**LENS/SHIELDING:**

- E** Enclosed Clear Flat Tempered Glass  
Lens is standard
- O** Open Bottom (no lens)

**MOUNTING:**

**P24** - 1/2" x 24" Long Pendant Stem with Canopy for mounting to recessed J-box in flat ceiling (standard) \*24" is standard but other lengths are possible. Please consult Solera for other lengths\*

**AC48** - ST cord with 48" Aircraft Cable Suspension (consult Solera for other lengths)

**3C** - 3' electrical cord with hook

**3CP** -3' electrical cord with hook and plug

**EM** Emergency Operation

**DM** Dimming Ballast

**SV** Swivel Canopy

**Ip65** Ip65 rated enclosure

**FINISH:**

Electrostatically applied, thermally cured powder coated paint. Available in Solera Standard colors:

**BL** Minitex Black

**WH** Minitex White

**BZ** Minitex Bronze

**SG** Silver Gray

**CC** Custom Color (Consult Solera)

PROJECT

DATE

QTY

NAME	LAMPING	OPTICS	COLOR	VOLT	SHIELDING	MOUNTING	OPTIONS	FINISH
AOR-HB		TV	TEMP. (LED)	120V 277V 347V	LENS E O	P48 AC48 3C 3CP	DM TP TS IP65	WH BL SG BZ CC*
			WW NW CW	120/277V				