

SAT-S

CONSTRUCTION:

Extruded aluminum lamping housing with three vertical trusses support upper and lower anti-glare shield rings. All stainless steel external hardware.

MOUNTING:

CM-Ceiling mounted on flat ceiling recessed J-Box(by others).
 WM - Wall mounted to standard recessed J-Box (by others)
 AC- Suspended with Aircraft Cable Pendant Design

LENS:

E- Enclosed Clear Glass Lens.

LAMPING:

INCANDESCENT

20INCT3 - G4 base lamp holder provided to accept the 1x20W T3 Halogen Lamps.(by Others)
 Incandescent lamping operation does not require a ballast.
 Factory wired to 120V.

LED:

3W High Power CREE LEDs with 50,000 hours rated lamp life @ 70% lumen maintenance.
 CW - Cool White (5000-7000°K) *standard
 Also Available in
 WW - Warm White (3500°K)
 NW - Neutral White (4100°K)

Electronic Driver is standard for LED.

ELECTRICAL:

Select from 120V, 277V, 347V (LED option only)
 (consult Solera for additional voltages)

OPTIONS:



OS - Offset Disk (standard is centred)

FINISH:



Electrostatically applied, thermally cured polyester powder coated paint finish.

Available in Solera Standard Colors:

- BL - Minitex Black
- WH - Minitex White
- SG - Silver Gray
- BZ - Minitex Bronze

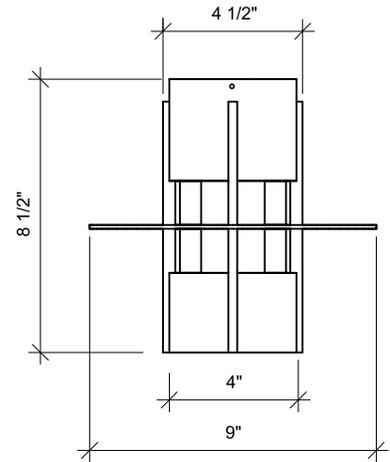

SIDE VIEW

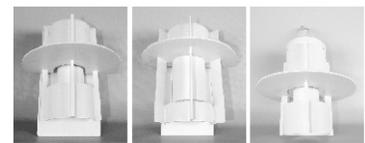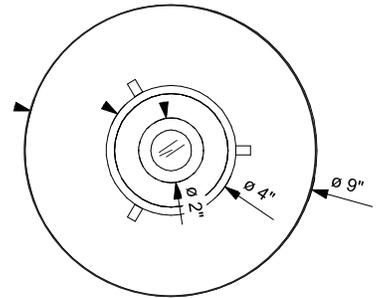

PROJECT

DATE

QTY

NAME	LAMPING	COLOR	VOLT	SHIELDING	MOUNTING	OPTIONS	FINISH
SAT-S	3W 20INCT3	TEMP. (LED)	120V 277V 347V 120/277V	E	CM WM AC	OS	WH BL SG BZ CC*