



PENDANT

**LAMPING:**  
LEDs with 50,000 hrs rated lamp life @70% lumen maintenance. 5000K Cool White is standard color temperature

Available in:  
WW - Warm White (3000K)  
NW - Neutral White (4000K)  
CW - Cool White (5000K)

RGB - Red, Green, Blue (Contact Solera for Specifics)

**ELECTRICAL:**  
High-efficiency driver with short circuit, over voltage and over temperature protection.

Working ambient temperature range of -40C to +40C.

Available in 120V-277V also 347V-480V.

\*Consult Solera for specific wattages,

**LENS/SHIELDING:**

OPL - Opal Acrylic Lens

**FINISH:**

Electrostatically applied, thermally cured, polyester powder coated paint finish. Available in Solera standard colors:

WH - Minitex White  
BL - Minitex Black  
BZ - Minitex Bronze  
SG - Minitex Silver Gray  
CC - Custom Color (Consult Solera)


**MOUNTING:**  
3AC48-CMB - 3 x 48" Long Aircraft Cables with SVT cord. Aircraft cables secure to 5" canopies which mount to flat ceiling and SVT cord secures to 10" canopy with ceiling mount ballast.

3AC48-SPD - 3 x Aircraft Cables come together at the central junction which then extends with an aircraft cable to single canopy for flat ceiling. (SPIDER MOUNT)


3AC48-TR - 3 x Long Aircraft Cables with SVT cord are connected to a central

**OPTIONS:**


DM 0-10V Dimming  
DM1 Dimming 1%  
2CC 2 Circuit Wiring  
SF Single Fuse  
EM Emergency Ballast/Driver  
SH Shallow Housing  
RB Remote Ballast  
3AC48-SPD-P 3AC48-SPD - 3 x Aircraft Cables come together at the central junction which then extends with 3/4" stem to single canopy for flat ceiling.

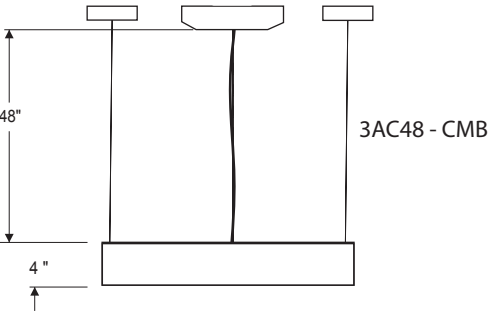


3AC48 -SPD



3AC48 -SPD-P



3AC48 -TR

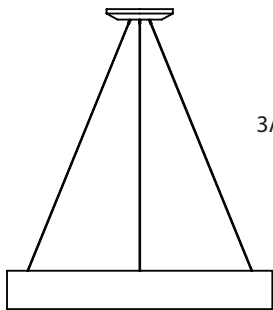

A

	A
CIRC-III-24	24"
CIRC-III-36	36"
CIRC-III-48	48"
CIRC-III-60	60"
CIRC-III-72	72"

CIRC-III

PROJECT

DATE

QTY

CIRC-III		CW	120/277V	CL	SYM	PT4/3		
NAME	LAMPING	COLOR TEMP. (LED)	VOLT	LENS	OPTICS	MOUNTING	OPTIONS	FINISH (TRIM)
CIRC-III	LED							
24"	24LED	WW	120V	OPL			DM	WH
36"	36LED	NW	277V			3AC48	DM1	BL
48"	48LED	CW	347V			3AC48-SPD	2CC	BZ
60"	60LED	RGB	120/277V			3AC48-TR	SF	SG
72"	72LED						EB	CC*
							SH	
							RB	
							CM	

Std. = STANDARD

\*CC - Custom Color, adder applies, please consult Solera