






8AC48

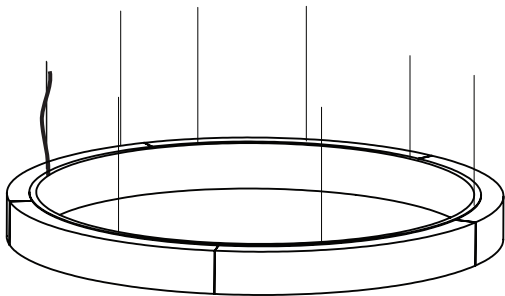

6AC48-SPD

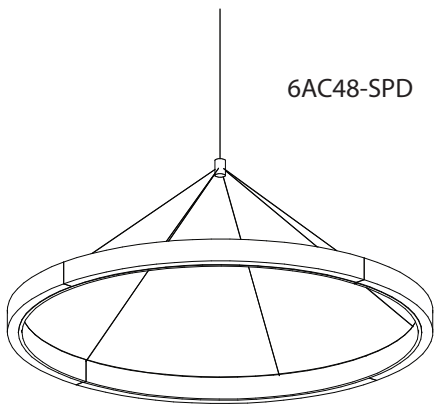

6AC48-SPD-P

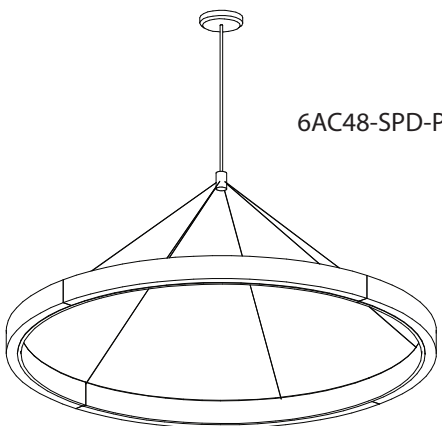

PENDANT

CIRC-110

LAMPING:
LEDs with 50,000 hrs rated lamp life @70% lumen maintenance. 5000K Cool White is standard color temperature

Available in:
WW - Warm White (3000K)
NW - Neutral White (4000K)
CW - Cool White (5000K)

RGB - Red, Green, Blue (Contact Solera for Specifics)

ELECTRICAL:
High-efficiency driver with short circuit, over voltage and over temperature protection.

Working ambient temperature range of -40C to +40C.

Available in 120V-277V also 347V-480V.

Consult Solera for specific wattages, etc.

LENS/SHIELDING:

OPL - Opal Acrylic Lens

FINISH:

Electrostatically applied, thermally cured, polyester powder coated paint finish. Available in Solera standard colors:

WH - Minitex White
BL - Minitex Black
BZ - Minitex Bronze
SG - Minitex Silver Gray
CC - Custom Color (Consult Solera)

MOUNTING:
8AC48 - 8 x 48" Long Aircraft Cables with SVT cord. Aircraft cables secure to 5" OD canopies which mount to flat ceiling.

6AC48-SPD - 6 x Aircraft Cables come together at the central junction which then extends with an aircraft cable to single canopy for flat ceiling. (SPIDER MOUNT)

6AC48-TR - 6 x Long Aircraft Cables with SVT cord are connected to a central canopy.

8TAC48 - 8 x Aircraft Cables with an Electrical cord. Aircraft Cables secure to one 10" OD canopy.

8AC48-RB - 8 x Aircraft Cables with SVT cord. Aircraft Cables secure to 2 x 5" OD &

OPTIONS:

DM 0-10V Dimming
DM1 Dimming 1%
2CC 2 Circuit Wiring
SF Single Fuse
EM Emergency Ballast/Driver
SH Shallow Housing
6AC48-SPD-P 6 x Aircraft Cables come together at central junction which then extends with an aircraft cable to single canopy for flat ceiling

PROJECT	DATE	QTY
---------	------	-----

CIRC-110		CW	120/277V	CL	SYM	PT4/3		
NAME	LAMPING	COLOR TEMP. (LED)	VOLT	LENS	OPTICS	MOUNTING	OPTIONS	FINISH (TRIM)
CIRC-110	LED							
110"	288LED	WW	120V	OPL		CM	DM	WH
		NW	277V			3AC48	DM1	BL
		CW	347V			3AC48-SPD	2CC	BZ
		RGB	120/277V			3AC48-TR	SF	SG
							EB	CC*
							SH	

Std. = STANDARD

*CC - Custom Color, adder applies, please consult Solera